

The CMI800++ central unit


Honeywell

- **Compact radio system**
- **Progressive built-in siren (up to 100 dB)**
- **5 indicator lamps**
- **Listening + intercom**
- **Built-in digital and sound transmitter (with optional built-in GSM)**
- **Low-voltage technology (4V)**
- **Highly self-reliant**
(> 2 days' life when mains power cuts)



Compact and Stylish

- **4 surveillance Area**
 - ◆ 1 “TOTAL” or “Main” zone
 - ◆ 1 “PARTIAL” zone
 - ◆ 1 “ANNEXE” zone
 - ◆ 1 “24/24” zone
- **Up to 32 fully programmable radio devices**
 - ◆ 30 detectors
 - ◆ 4 keyboards
 - ◆ 10 remote control units (including operator control)
 - ◆ 4 radio sirens (SI800HF and/or SEF800HF)
 - ◆ 12 receivers (X10 and IRVideo instruction receivers)
- **3 alert channels**
- **Fire siren function**
- **Built-in video doubt raising (optional)**
- **Built-in audio doubt raising**
- **Cable extensions for configurable control**
- **Connectors for 3 TP800 intercom terminals on the spot or with the built-in audio**

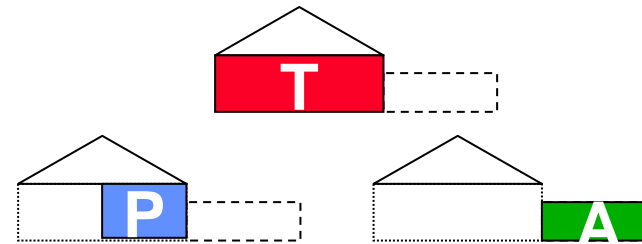

Wide choice of configuration

- **User functions**

- ◆ 10 user codes and 1 installer code
- ◆ Selective supervision
- ◆ Anti-tampering alarm
- ◆ Forced alarm
- ◆ Deliberate temporary omit of a detector
- ◆ Activate / de-activate the chime


- **Operation**

- ◆ Independently-programmed input / output timeouts
- ◆ Programmable siren-triggering delay
- ◆ Memorising the last 1000 events

Flexibility in everyday use

- Transmission to telesurveillance unit
 - ◆ Multi-protocol (SECOM3 - CESA - SURTEC - CONTACT ID)
 - ◆ Two-way calling with 2 different protocols
 - ◆ POINT/POINT intrusion alarms
 - ◆ Forced alarm
 - ◆ Built-in protection
 - ◆ Detection telephone line /GSM absent
 - ◆ Composite alarm
 - ◆ Mains fault
 - ◆ Battery low
 - ◆ Radio interference
 - ◆ Device battery low
 - ◆ Radio supervision

- Sound transmission to fixed or mobile telephones
 - ◆ DTMF remote control unit (turn outputs on / off and control them remotely)
- Audio doubt raising (built-in listening and intercom)
- Built-in line overvoltage protection

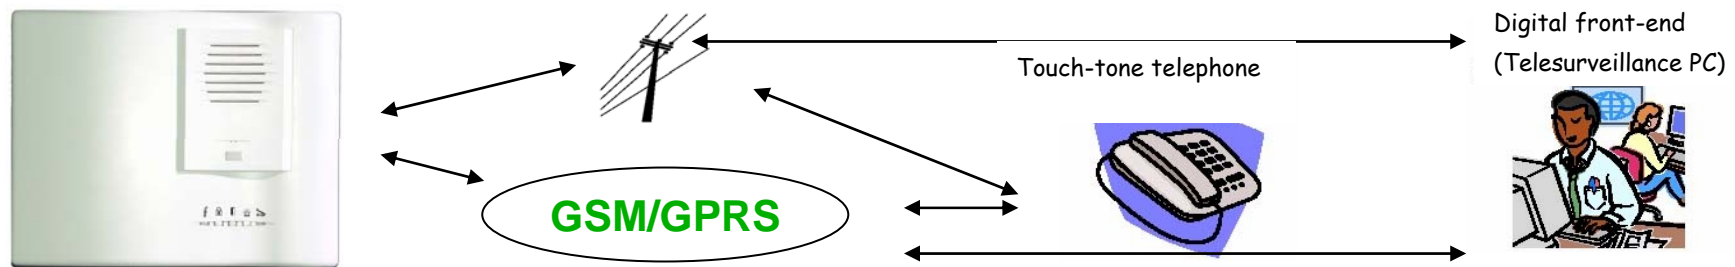


Standby or main GSM built into the central unit (optional)

CMI800++

Remote maintenance

Honeywell

- **DOMOPC software + DOMODEM2 modem**
 - Remote configuration
 - Remote diagnosis
 - Events log
- **By-pass for answering machine and/or fax**

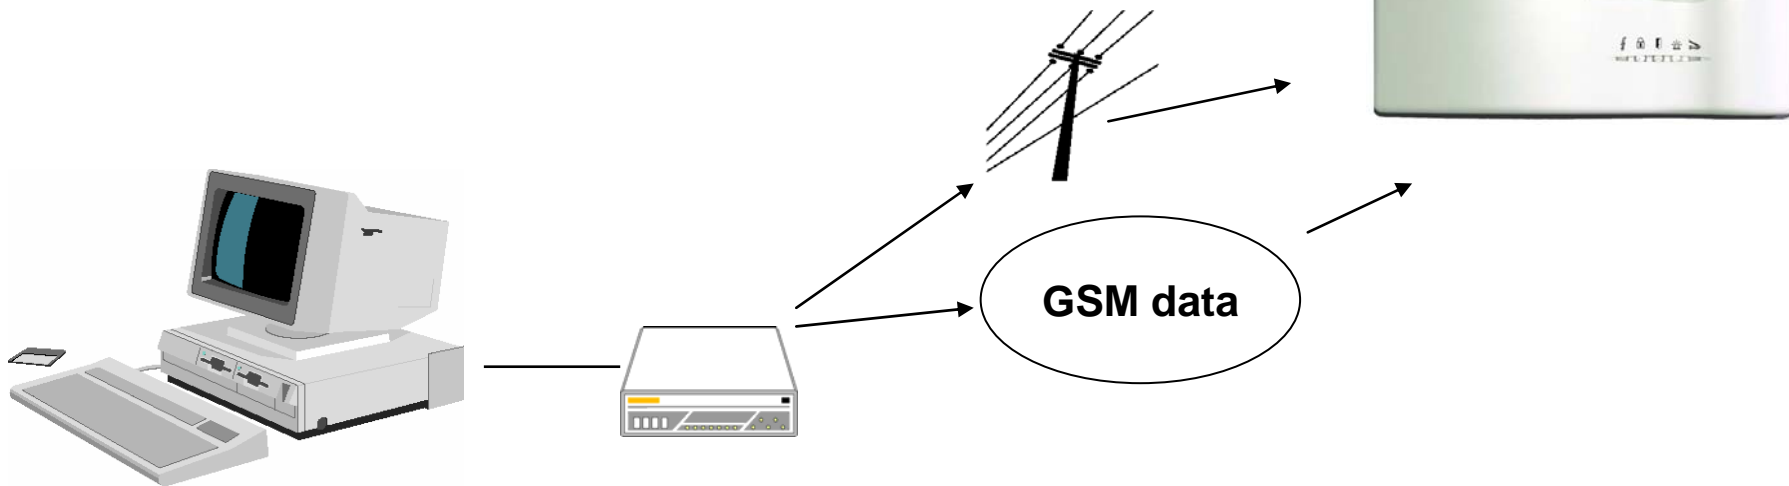

Saving time for the installer

- **Equipment slaving to alarm events or to keyboard and remote control unit commands**
 - **1 cable output**
 - ♦ Controlling a siren or other device powered from an external source (max 12V, 150 mA)
 - **1 connection for XM10 transmitter / carrier current**
 - ♦ Controlling X10 equipment with a configurable address for On/Off states:
 - AW10 wall switch,
 - AM12 socket adapter,
 - DIN switch bank rail for AD10 meter
 - ...
 - ♦ Centralised remote control of lights, rolling shutters, heating, ventilator, etc., by:
 - Keypads
 - Remote control units
 - Telephone



Open-ended system to adapt the offer